



# AQUATECH PARTS BULLETIN

This is an informational bulletin to help identify the Y-Strainers use on our truck mounted units.

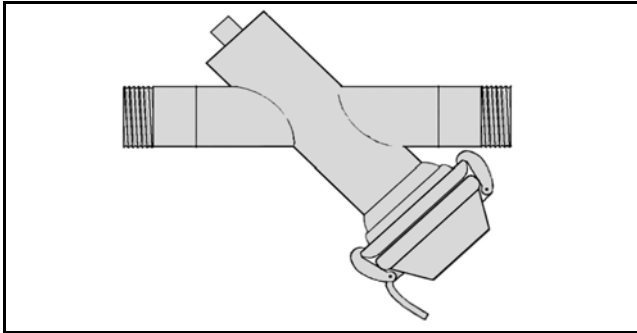

**OBSOLETE A240026**

This is the original metal Y-strainer used by Aquatech, Inc. It was found on just about all truck mounted units (C-series, B-series, SJ, and SJR) up until the mid 90s. It featured 2½" male NPT threads and a camlock cap. The assembly is obsolete and must be retrofitted by A380819 or A380820.

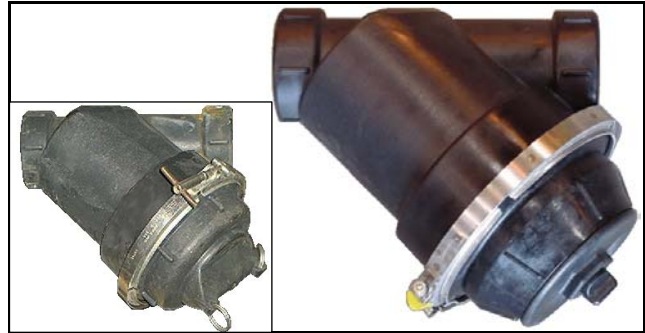

**OBSOLETE A240027 & A380806**

These 3"FNPT Y-strainer feature a stainless steel V-band clamp to hold the cap on. The earlier version of this strainer (p/n A240027 in the inset) had a T-handle nut on the clamp. The succeeding version (p/n A380806) utilized a locknut on the clamp and added a cap with a screw out outer cap to access the screen. Both of these are no longer available and are replaced by p/n A380820 below.



**A380819**

The A380819 replaced the A240027 in production. Initially this was a running change made by Aquatech Inc. and part number A240027 was listed in many owners manuals for this strainer. Later part number A380819 was established to help alleviate confusion over replacement components.



**A380820**

This is the 3"FNPT Y-Strainer used in our current production machines and is by far the best design. The camlock outer cap makes it easy to check the screen on a regular basis.

**Note:** To prevent damage to the cap ears for the above two Y-strainers, we suggest that spanner wrench part no. A380193 be purchased also.

IL	STRAINER ASY.	BODY	SCREEN	CAP	O-RING	CLAMP	OUTER CAP	GASKET
1	A240026 *	NLA	A131107	A170310	A190770	--	--	--
2	A240027 *	NLA	NLA	NLA	NLA	USE A380806-2	--	--
2	A380806 *	A380806-5	A380806-4	A380806-3	A380806-1	A380806-2	Not Available	--
3	A380819	A380819-4	A240028	A240027-3	A240034	--	--	--
4	A380820	A380820-5	A380820-1	A380820-3	A240034	--	A380820-4	A380820-7

\* Designates obsolete part number