
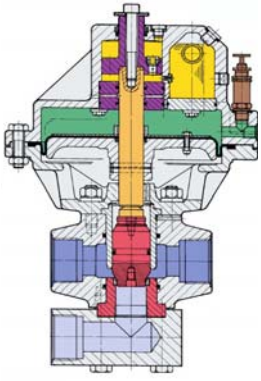
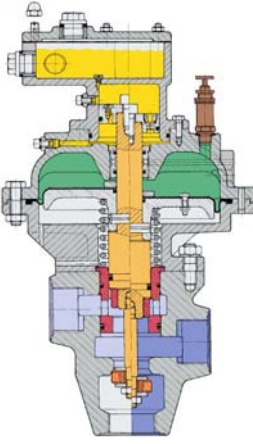
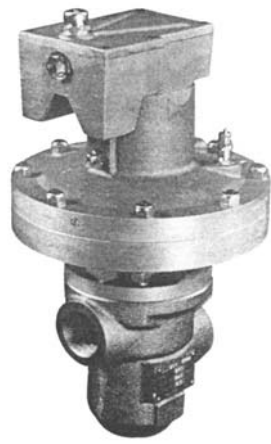


AQUATECH

PARTS BULLETIN

There are four pneumatically operated unloader (pressure regulating) valves used on various Aquatech units as an option. Here is an informational bulletin to help identify them and list their more commonly requested replacement parts.

				
MSÜV Photo	MSÜV Cross Section	MSSV Photo n/a	PN3 Cross-Sectional Diagram n/a	
A380279	A380279-2	A380279-1	A215555	A381507
Model MSÜV29/300		Model MSSV24/250	Model PN3/160	Model PN3/240
Uraca (Germany)			Pratisolli (Italy)	
p/n 205-0311-01	p/n 205-0311-02	p/n 205-0310-01		
4350 psi max.		3625 psi max.	2350 psi max.	3500 psi max.
170 gpm max.		92 gpm max.	120 gpm max.	80 gpm max.
Assembly includes 1"MJIC Adapters	Assembly includes 1"FNPT Adapters	Assembly includes 1"MJIC Adapters	All water ports are 1½" BSP-F	
Repair Kit A380279-RK		Repair Kit A380279-R	Repair Kit A215555-R	
Repl. Diaphragm A380279-DIAPHRAGM			Repl. Diaphragm A215555-R-15 *	
Safety Valve A380279-SV *			Safety Valve A215555-R43 *	

*Not included in Repair Kit

Lubricant = ISO VG46 Hyd. Oil